


Supports any system.

Applications for BHT-1300 series


In retail/wholesale fields

- It can be held comfortably even by women, and its aesthetics enable it to fit in anywhere with style.
- Thanks to its 360° reading capability, inventory time can be drastically cut.

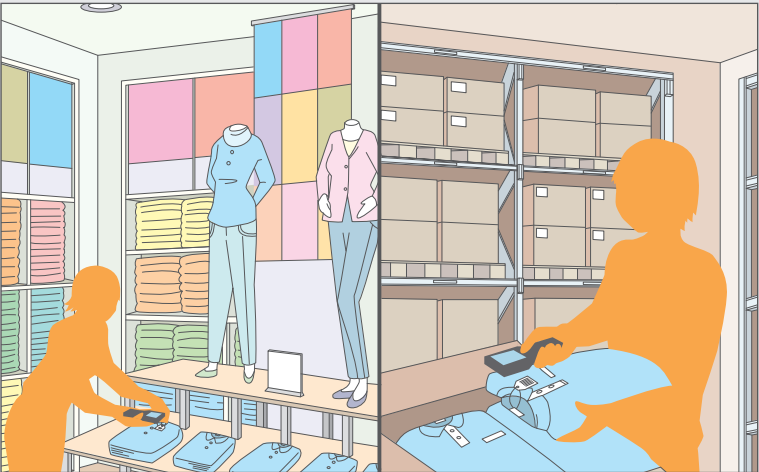

In distribution/manufacturing fields

- Round-the-clock use of the model, which is compliant with IEEE 802.11 b/g/n, is possible while it is operated online.
- The model's robust durability ensures accurate use in tough work environments with peace of mind.

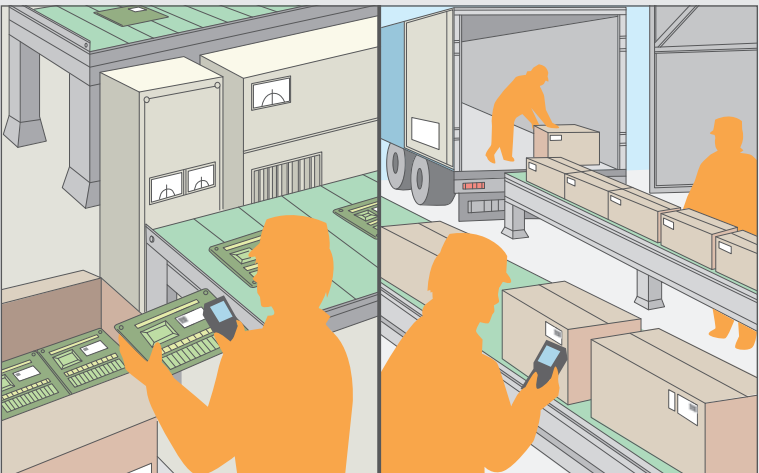

Why are DENSO WAVE's products chosen over others?

Rich experience

Pioneering company, established in 1978, in the automatic recognition field whose products boast the No. 1 spot for the number of units in use.

Reliable, integrated production system

DENSO WAVE is engaged in every aspect of a product, its development, production, marketing and maintenance.

Long-term support

Even after sales end, 5-year support is guaranteed.

Superior engineering prowess

DENSO WAVE is the company that developed QR Code, used all over the world.

DENSO

BHT-1300 series specification

Type	2D code model				Barcode model			
	BHT-1361Q-CE	BHT-1361QWB-CE	BHT-1306Q	BHT-1306QWB	BHT-1361B-CE	BHT-1361BWB-CE	BHT-1306B	BHT-1306BWB
OS	Windows Embedded Compact 7			BHT-OS	Windows Embedded Compact 7			BHT-OS
CPU	ARM Cortex-A8 800 MHz			32-bit RISC microprocessor	ARM Cortex-A8 800 MHz			32-bit RISC microprocessor
Memory	Flash ROM ¹ 2.0 GB (1.2 GB for user area)			64 MB (45 MB for user area)	2.0 GB (1.2 GB for user area)			64 MB (45 MB for user area)
Display	2.4 inch QVGA (240x320 dots)				2.4 inch QVGA (240x320 dots)			
	Liquid crystal dot matrix display (color)				Liquid crystal dot matrix display (color)			
	Number of Dots ²			15 (2-byte characters) x 20 rows, 30 (1-byte characters) x 20 rows	Number of Dots ²			15 (2-byte characters) x 20 rows, 30 (1-byte characters) x 20 rows
	Displayable characters ³			10 (2-byte characters) x 13 rows, 20 (1-byte characters) x 13 rows	Displayable characters ³			10 (2-byte characters) x 13 rows, 20 (1-byte characters) x 13 rows
Scanner	Area sensor				Advanced scan plus (CCD)			
	Mode			QR code, micro QR code, SQRC iQR, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 DataBar Composite (EAN.UCC Composite)	Mode			QR code, micro QR code, SQRC iQR, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 DataBar Composite (EAN.UCC Composite)
	Decode			2D code	Decode			Barcode
	Barcode			QR code, micro QR code, SQRC iQR, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 DataBar Composite (EAN.UCC Composite)	Barcode			QR code, micro QR code, SQRC iQR, PDF417, micro PDF417, Maxi code, DataMatrix (ECC200), GS1 DataBar Composite (EAN.UCC Composite)
Minimum resolution	2D code			0.167 mm	2D code			0.125 mm
	Barcode			100 mm	Barcode			50 mm
	Reading reference position			Area guide maker	Reading reference position			Area guide maker
	Maker			LED in two colors: Blue/red, speaker, vibrator	Maker			LED in two colors: Blue/red, speaker, vibrator
Scan Confirmation	LED in two colors: Blue/red, speaker, vibrator			LED in three colors: Blue/red/green, speaker, vibrator	LED in two colors: Blue/red, speaker, vibrator			LED in three colors: Blue/red/green, speaker, vibrator
	LED in two colors: Blue/red, speaker, vibrator			LED in three colors: Blue/red/green, speaker, vibrator	LED in two colors: Blue/red, speaker, vibrator			LED in three colors: Blue/red/green, speaker, vibrator
	LED in two colors: Blue/red, speaker, vibrator			LED in three colors: Blue/red/green, speaker, vibrator	LED in two colors: Blue/red, speaker, vibrator			LED in three colors: Blue/red/green, speaker, vibrator
	LED in two colors: Blue/red, speaker, vibrator			LED in three colors: Blue/red/green, speaker, vibrator	LED in two colors: Blue/red, speaker, vibrator			LED in three colors: Blue/red/green, speaker, vibrator
Key input section	Number of keys				Number of keys			
Communication	Optical I/F			Infrared ray (IrDA Ver. 1.2)[low power][physical signaling layer-compliant]	Optical I/F			Infrared ray (IrDA Ver. 1.2)[low power][physical signaling layer-compliant]
	Transmission speed			Up to 115.2 kbps, 460.8 kbps	Transmission speed			Up to 115.2 kbps, 460.8 kbps
	Communication distance			Approximately 0.15 m MAX.	Communication distance			Approximately 0.15 m MAX.
	Wireless LAN			Suitable standard	Wireless LAN			Suitable standard
Access method	Frequency			IEEE 802.11b/g/n compliant	Frequency			IEEE 802.11b/g/n compliant
	Communication distance ⁴			Approx. 75 m indoors, approx. 200 m outdoors	Communication distance ⁴			Approx. 75 m indoors, approx. 200 m outdoors
	Transmission speed ⁵			IEEE802.11n:11/15.5/21 Mbps, IEEE802.11g:54/48/36/24/18/12/9/6Mbps, IEEE802.11n:65/58.5/52/39/26/19.5/13/6.5Mbps	Transmission speed ⁵			IEEE802.11n:11/15.5/21 Mbps, IEEE802.11g:54/48/36/24/18/12/9/6Mbps, IEEE802.11n:65/58.5/52/39/26/19.5/13/6.5Mbps
	Access method			Infrastructure mode, ad-hoc mode	Access method			Infrastructure mode, ad-hoc mode
Security	Security			WEP40, 128 WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES), WPA-1x(TKIP/AES/EAP-TLS, PEAP/LEAP/EAP-FAST), WPA-2x(TKIP/AES/EAP-TLS, PEAP/LEAP/EAP-FAST), 802.1x(WEP/EAP-TLS, PEAP/LEAP/EAP-FAST)	Security			WEP40, 128 WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES), WPA-1x(TKIP/AES/EAP-TLS, PEAP/LEAP/EAP-FAST), WPA-2x(TKIP/AES/EAP-TLS, PEAP/LEAP/EAP-FAST), 802.1x(WEP/EAP-TLS, PEAP/LEAP/EAP-FAST)
	Bluetooth			Bluetooth Ver. 2.1 + EDR based class 2	Bluetooth			Bluetooth Ver. 2.1 + EDR based class 2
	Cable I/F			USB Ver. 2.0 (USB microB)	Cable I/F			USB Ver. 2.0 (USB microB)
	Additional functionality			Clock, speaker, vibrator, battery and voltage indicators, keypad backlight	Additional functionality			Clock, speaker, vibrator, battery and voltage indicators, keypad backlight
Card slot	MicroSD or MicroSDHC (up to 32 GB)x1(FAT32 compliant)				MicroSD or MicroSDHC (up to 32 GB)x1(FAT32 compliant)			
Environmental performance	Operating temperature				Operating temperature			
Mass	Security level			IP54	Security level			IP54
	Drop resistance ⁷			10 times of dropping tests from 2.0/1.2 m height over a concrete floor with each of 6 sides of the enclosure facing down (60 times total)	Drop resistance ⁷			10 times of dropping tests from 2.0/1.2 m height over a concrete floor with each of 6 sides of the enclosure facing down (60 times total)

¹ Memory (about 400 KB) for font file area included in the user area. ² Although the effective number of picture elements is more than 99.99% thanks to high-precision technologies used to manufacture LCDs, allow the possibility of some elements, less than 0.01%, that are missing or permanently turned on. ³ For BHT-OS model, the standard font, the small font, the 30-dot font and the 40-dot font can be set in addition to the 16-dot font and the 24-dot font. ⁴ Windows-OS model and BHT-OS model differ in key layout and allocation. ⁵ The listed figures for communication distance and speed are theoretically possible figures and may vary depending on the work environment where the unit is used. ⁶ Zero to 40°C when batteries are being recharged. ⁷ Result obtained in a test under regular temperature is shown and not meant as a guarantee.

Power supply specifications

Type	2D code model				Barcode model			
	BHT-1361Q-CE	BHT-1361QWB-CE	BHT-1306Q	BHT-1306QWB	BHT-1361B-CE	BHT-1361BWB-CE	BHT-1306B	BHT-1306BWB
Power	Main battery				Main battery			
	Lithium-ion battery			Lithium-ion battery or 3 AAA alkaline batteries (separately sold battery adapter required)	Lithium-ion battery			Lithium-ion battery or 3 AAA alkaline batteries (separately sold battery adapter required)
	Operating time ⁸			Standard battery	Operating time ⁸			Standard battery
	Thin battery			16 hours ⁹	Thin battery			16 hours ⁹
AAA alkaline batteries	29 hours ⁸			29 hours ⁹ /27 hours ^{10/11}	29 hours ⁸			29 hours ⁹ /27 hours ^{10/11}
	95 hours ⁸			95 hours ⁹ /40 hours ^{10/11}	95 hours ⁸			95 hours ⁹ /40 hours ^{10/11}
	55 hours ⁸			55 hours ⁹ /21 hours ^{10/11}	55 hours ⁸			55 hours ⁹ /21 hours ^{10/11}
	45 hours ⁸			45 hours ⁹ /17 hours ^{10/11}	45 hours ⁸			45 hours ⁹ /17 hours ^{10/11}

⁸ The described operating time is a reference figure under regular temperatures and may vary depending on usage conditions. ⁹ With one reading pass over a 5s period and backlight level 1. ¹⁰ When ratios of reading, wireless communication, rewriting of screen and holding durations are 1:1:1:20 under continued wireless operation and backlight level 1. ¹¹ When ratios of reading, wireless communication, rewriting of screen and holding durations are 1:1:1:20. The wireless function is enabled only when the terminal is connected to the wireless network; the wireless function is disabled otherwise. The backlight level is 1.

To use this product safely

- Before using this product, please read its User's Manual thoroughly for correct use.

For more information, please visit our website

<http://www.denso-wave.com/en/adcd/>



● Appearance and specifications are subject to change without prior notice. ● Description stated in this catalogue is as of January, 2015.

DENSO

HANDY TERMINAL

NEW

BHT-1300 SERIES

2D code model



<Windows-OS model>
BHT-1361Q-CE
BHT-1361QWB-CE

<BHT-OS model>
BHT-1306Q
BHT-1306QWB

Barcode model



<Windows-OS model>
BHT-1361B-CE
BHT-1361BWB-CE

<BHT-OS model>
BHT-1306B
BHT-1306BWB

Ultimate usability realized in these models

Windows-OS model released!!

OS can be selected according to use

• Windows-OS / • BHT-OS

Amazing 360° reading capability*

*2D code model

OS can be selected from “Windows-OS” and “BHT-OS”!

NEW

Windows-OS model released,
as user-friendly as ever

Windows-OS



* Screen showing simulated images

User friendly!



Long operation possible even
when the unit is kept online

• Proprietary power-saving design allowing a 28-hour* consecutive operation, the longest in its class.

*When ratios of reading, wireless communication, rewriting of screen, and holding durations are 1:1:1:20 in continuous wireless operation; when a standard battery is mounted in barcode models.



Intuitive operation with
touch panel

• A convenient touch panel allows intuitive operation.



High-performance hardware
enables comfortable operation.

• High-speed CPU and large-capacity memory enable fast and efficient processing.

Equipment that can be managed with peace of mind!



Based on Windows Embedded
Compact 7

• Easy to use around the world, with a versatile OS.



Remote desktop/web browser
reduces development man-hours.

• Newly incorporated “remote desktop plug-in” and “web browser plug-in” enable thin client implementation with lower development costs.



Quick wireless cloning*

• Copies of another terminal can be made quickly.
• Each terminal can be set up wirelessly without using a PC.

*Bluetooth + wireless LAN model only.



Universal handy terminal launched!



Compact,
but easy to use

• Each model's body is more than 15% thinner, lighter and smaller*
• Design was sought for functional beauty that also allows comfortable operation despite size constraints.
• Dome-shaped keys are used, which can be operated easily by workers wearing work gloves.


*Compared to Denso Wave's BHT-800Q when a thin battery is mounted in respective 2D code models.



Capability to read codes from any angle
of 360° makes for quick reading.*

• Smooth 360° reading is realized using the latest algorithms.
• Compared to barcode models, working time with the model can be reduced up to 30%.

*With only 2D code model



Distinctive displays even
in bright sunlight

• A high-visibility LCD, High-Bright Display, is used.
• A wide viewing angle, and therefore, enhanced visibility from oblique angles is realized.



Unique power-saving design
enables extended operation time.

• Operation time longer than Windows-OS model.
• Unique power-saving design enables best-in-class long-time operation of 42 hours* even when continuously connected by wireless.

*Ratio of scanning: wireless communication: screen update: standby = 1:1:1:20 under continuous wireless WAN connection. For barcode model with a standard battery.



Ready for use with simple
business application software.

• A simple business application software (Easy Pack Ad) allowing collection of actual records for inventory and inspection plus 1:1/1:n collation is included as standard equipment.
• No other devices are required for data transmission.



Easy-to-use
battery-powered terminal*


• Even in the case of sudden loss of battery power, commercially-available dry-cell batteries can be used.

*A dry-cell adapter is separately required.



Equipped with BHT-BASIC.

• Equipped with a development tool to help develop all kinds of applications. Coding, debugging and installation can be efficiently controlled.
• Highly compatible, unique OS enables effective use of application assets.



Solid middleware suited
to customers' uses.

• Various software applications are prepared in cooperation with partner companies across Japan. We introduce software applications best suited to the industry and implementation for each customer.



Easy cloning
with IrDA.

• Copies of another terminal can be made easily.
• BHT-OS model is as user-friendly as previous models, yet enables cloning with IrDA.



Solid and robust to protect
both hardware and data

• Built-in toughness that endures droppings from 2 m height and operates in minus 20° to 50°C temperature range.
• For Windows-OS model, data on terminals can be backed up with BHT Backup.
• For BHT-OS model, its transaction function automatically restores the immediately previous conditions in the case where the battery is disconnected and a file error occurs.



Comprehensive support system
available anywhere in the world.

• The model can be used in more than 40 countries worldwide.
• Supports multi-language display.
• For Windows-OS, fonts for more than 40 countries are supported.
• For BHT-OS model, Japanese, English, Chinese, Korean and Thai fonts are supported.

Certification expected from the following countries:
27 countries in the EU, USA, Canada, Australia, New Zealand, China, Taiwan, Hong Kong, South Korea, Singapore, Thailand, Malaysia, India, Indonesia, Philippines, Vietnam, Russia, Brazil



3-year warranty allows customer's
long use with peace of mind.

• Customers who register on Denso Wave's website are offered a 3-year warranty.
*1-year warranty for consumables as defined by DENSO WAVE.

Warranty period is generally
1 year
With BHT-1300,
warranty period is
3 years.

Compact model with
ultimate usability

BHT-OS



* Screen showing simulated images

BHT-1300 SERIES

Dimensions	Unit: mm (for reference only)	Components
	2D code model with thin battery mounted	<Windows-OS model> ● Hand strap with stylus ● Guidelines for operation * Battery and battery cover are not supplied with the product HP Instruction manual <BHT-OS model> ● Hand strap ● Guidelines for operation * Battery and battery cover are not supplied with the product HP Instruction manual
	Barcode model with standard battery mounted	
	2D code model with thin battery mounted	
	Barcode model with standard battery mounted	

Software
<Windows-OS model> ● Development tools * Windows Embedded Compact 7-based Software Development Kit for BHT* (SDK) HP * This application software can be downloaded from our dedicated customer site only by customers who purchased Windows-based BHT. ● Preinstalled software * Keyboard interface application software [kbiCE] * Launcher [Application Launcher] * Wireless setting tool [WLAN Manager] * Back-up tool [BHT Backup] <BHT-OS model> ● Development tools * BHT-BASIC4.0 Development Pack - Set items * BHT-BASIC4.0 Compiler * BHT-BASIC4.0 Remote Debugger * BHT-BASIC4.0 Transfer Utility * BHT-C software development kit HP ● Preinstalled software * Easy Pack Ad for BHT-1300 HP ● HTML browser ● BHT Browser ● Setup software * BHT Setting HP ● Online system emulator * BHT Term Emulator
HP Items with this mark are available from the company's homepage (QBdirect) free of charge

Option (sold separately)				
<Windows-OS model> ● Holder, which performs data communication with BHT communication unit and the up-level device * CU-1301A (RS-232C communications + recharging) * CU-1311A (Ethernet communications + recharging) * CU-1321 (USB communications + recharging) Common				
Between BHT and host	Communication mode	CU-1301A	CU-1311A	CU-1321
Charging unit	Battery charge time	RS-232C	Ethernet (10BASE-T)	USB2.0
		Approx. 3.5 hrs for standard battery/		Full speed mode-compatible
		Approx. 2.5 hrs for thin battery		Approx. 10 hrs for standard battery/
				Approx. 6 hrs for thin battery*
Size(mm)		109(D)×95(W)×111(H)		
Working voltage	AC adapter**			Supplied from USB port/AC adapter**
*1 Changes depending on the power supplying capacity of connected device: approx. 3.5 hrs for standard battery and approx. 2.5 hrs for thin battery when AC adapter is connected. *2 The AC adapter is optional.				
● Batteries/battery adapters • BT-130LA-CE-C (thin battery + battery cover) • BT-130L-CE-C (standard batteries + battery cover) • BT-130LA (thin battery only) Common • BT-20LB (standard batteries only) Common • BT-20LB (standard batteries only) Common • B-130D (adapter for drycell)				
● Soft case and others • SCBHT-1300 (soft case) Common • WHBHT-1300 (waist case) Common • EA-13B (touch scan attachment for barcode models) Common • NSBHT-1300 (Neck strap) Common				
● Communication cable • CBBHT-US2000/C13-4A-CE * The BHT-1300 can be charged by connecting it to a USB charger or other power adapter, or a PC USB port. When charging the BHT-1300, use a device that satisfies the following output and USB charging specifications. Output specifications: (voltage) DC5.0-2.5V(current) 1.2A or higher Battery Charging Specification Rev. 1.2				

<BHT-OS model> ● Holder, which performs data communication with BHT communication unit and the up-level device * CU-1301 (RS-232C communications + recharging) * CU-1311 (Ethernet communications + recharging) * CU-1321 (USB communications + recharging)				
Between BHT and host	Communication mode	CU-1301	CU-1311	CU-1321
Charging unit	Battery charge time	RS-232C	Ethernet (10BASE-T)	USB2.0
		Approx. 3 hrs for standard battery/		Full speed mode-compatible
		Approx. 2 hrs for thin battery		Approx. 7 hrs for standard battery/
				Approx. 4 hrs for thin battery*
Size(mm)		109(D)×95(W)×111(H)		
Working voltage	AC adapter**			Supplied from USB port/AC adapter**
*1 Changes depending on the power supplying capacity of connected device: approx. 3 hrs for standard battery and approx. 2 hrs for thin battery when AC adapter is connected. *2 The AC adapter is optional.				
● Batteries/battery adapters • BT-130LA-C (thin battery + battery cover) • BT-130L-C (standard batteries + battery cover) • BT-130LA (thin battery only) Common • BT-20LB (standard batteries only) Common • B-130D (adapter for drycell)				
● Soft case and others • SCBHT-1300 (soft case) Common • WHBHT-1300 (waist case) Common • EA-13B (touch scan attachment for barcode models) Common • NSBHT-1300 (Neck strap) Common				
● Communication cable • CBBHT-US2000/C13-4A * The BHT-1300 can be charged by connecting it to a USB charger or other power adapter, or a PC USB port. When charging the BHT-1300, use a device that satisfies the following output and USB charging specifications. Output specifications: (voltage) DC5.0-2.5V(current) 1.0A or higher Battery Charging Specification Rev. 1.2				
● Recharger • CH-1104 Common • CH-1354 Common • CH-201A (Battery charger) Common • CH-201B (Battery charger) Common				

[Common](#) Peripheral devices bearing this mark can be used for both Windows OS and BHT-OS models.