# HAND HELD SCANNERS Product Guide













## HAND HELD SCANNERS

Datalogic's Hand Held Scanner product line offers products and solutions for automatic data capture and process automation throughout the customer's entire value chain in the Retail, Manufacturing, Transportation & Logistics and Healthcare industries. The wide range of general purpose hand held readers offer a variety of choices for most data collection activities. Product sets propose corded and cordless options together with best in class reading technologies, ready to solve current and future needs and applications. Datalogic's PowerScan industrial hand held readers are data collection's definitive example of ruggedness and durability, coupled with outstanding performance and unyielding reliability.

#### Technologies

- Linear and area imaging technology for 1D and 2D bar codes
- Megapixel performance and distinctive white-illumination technology
- Bluetooth<sup>®</sup> and Datalogic's STAR Cordless System<sup>™</sup> radio connectivity
- Datalogic's exclusive 3GL™ (3 Green Lights) and 'Green Spot' technology
- Great ergonomics and cutting edge design
- Rugged enclosures; Durable and reliable
- · Healthcare models with Disinfectant-Ready enclosures and anti-microbial additives
- Wireless battery charging system
- Adjustable position cradle with scan-while-charging capability
- Smart battery management

## HEALTHCARE

## MANUFACTURING

## INDUSTRY APPLICATION

#### RETAIL

- Point of Sale Checkout
- Shelf Replenishment
- Price Checking
- Store Inventory
- Goods Receiving
- Postal, Bank, Utilities,
- Public Administration
- Access Control, Entertainment

#### T&L

- Shipping / Receiving
- Parcel Preparation
- Picking / Put Away
- Automatic Sorting Back-Up
- End of Line Sorting




#### MANUFACTURING

- Manufacturing Shop Floor
- Component Traceability
- Work-in-Progress
- Sub-Assembly
- Quality Control
- Time and Cost Analysis
- Control Machines Set-up
- In-line Inventory Control

#### HEALTHCARE

- Bedside Care
- Admittance
- Clinical Lab
- Surgical tool tracking
- Blood bank
- Pharmacies



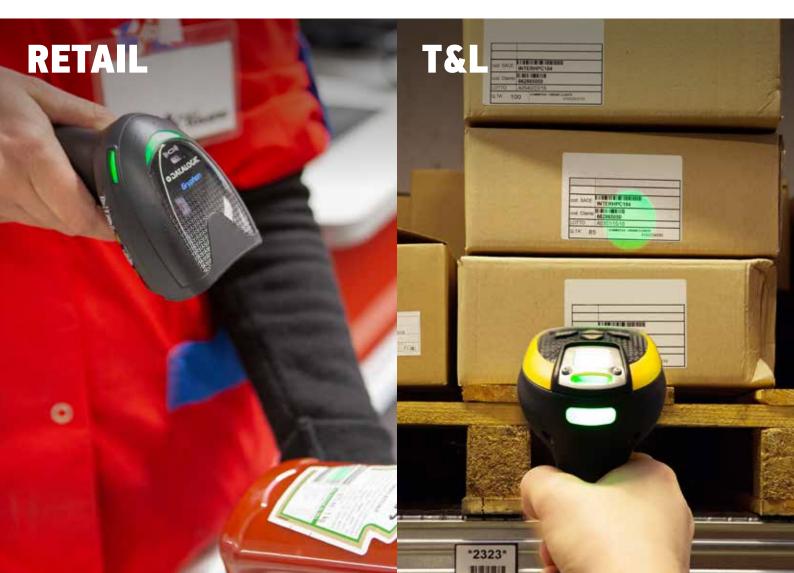



## GENERAL PURPOSE HAND HELD READERS

| CORDLESS FEA   | ATURES                   | TD1100 FAMILY   | HERON™   | 4 FAMILY   |
|--|--------------------------|---|--|--|
| CONTACT  | 0 to 5 cm / 0 to 2 in    |   |  |  |
| INSTINCTIVE  | 0 to 30 cm / 0 to 12 in  |   |  |  |
| DISTANCE   | 0 to 100 cm / 0 to 39 in |   |  |  |
| LONG RANGE   | 0 to 250 cm / 0 to 98 in |   |  |  |
| AUTO RANGE   | Up to 10 m / 3 ft        | 6   | ~  |  |
|  |                          |   |  |  |
|  |                          |   |  | No. of Contract of |
|  |                          | TD11XX  | HD31XX   | HD34XX   |
|  |                          | The TD1100 series of linear imagers<br>are a cost-effective solution for<br>users who require close contact<br>bar code reading. Used in Retail,<br>Services, Banking, etc. | The Heron HD3100 is a linear imager<br>bringing high style and modern tech-<br>nology to the point-of-sale. Available<br>in a 'carbon-fiber' or 'silver' design. | The Heron HD3430 2D area imager<br>brings elegance with advanced 2D<br>reading technology to the modern<br>point-of-sale. Available in a 'car-<br>bon-fiber' or 'silver' design.   |
| APPLICATIONS   | ;                        |   |  |  |
| Retail   |                          | Х   | Х  | Х  |
| Manufacturing  |                          |   |  |  |
| Transportation & Logistics   |                          | Х   |  |  |
| Healthcare   |                          |   |  |  |
| FEATURES   |                          |   | Lincortmoner   |  |
| Reading Technolo   | gy                       | Linear Imager   | Linear Imager  | Area Imager  |
| Reading Range  |                          | Contact/Instinctive   | Instinctive  | Instinctive  |
| Aiming System  |                          | Scan Line   | Scan Line  | 4-Dot / Center Cross Aimer   |
| Wide Scan Angle  |                          |   | Х  |  |
| Host Interface   |                          | RS-232 / USB / Keyboard Wedge /<br>Wand Emulation   | RS-232 / USB / Keyboard Wedge  | RS-232 / USB / Keyboard Wedge  |
| DATA CAPTUR  | Ξ                        |   |  |  |
| Bar Codes  |                          | 1D  | 1D   | 1D and 2D  |
| Direct Part Marked (DPM) Codes   |                          |   |  |  |
| Digital Watermarks   |                          |   |  |  |
| Image Capture  |                          | V   | V  | X  |
| Reads from Smartphone or screen displays Datalogic's 'Green Spot' Technology |                          | X   | X X  | X  |
| RUGGEDNESS   |                          |   |  | Λ  |
|  | late and Liquid Sealing) | IP30  | IP40   | IP40   |
| Drop to Concrete   |                          | 1.5 m / 5.0 ft  | 1.5 m / 5.0 ft   | 1.5 m / 5.0 ft   |
| Factory Warranty   |                          | 5 Years   | 5 Years  | 5 Years  |
| CORDLESS FEATURES  |                          |   |  |  |
| Wireless Technolo  | ogy (STAR / Bluetooth )  |   |  |  |
| Wireless Range - Travel Distance from Base                                   |                          |   |  |  |
| Display / Keypad for 2-Way Communication                                     |                          |   |  |  |
| Batch Mode Capability  |                          |   |  |  |
| Battery Type   |                          |   |  |  |
| Battery Life - Sca   | ns Between Charge        |   |  |  |
| Scan While Charg   | ing                      |   |  |  |

### GENERAL PURPOSE HAND HELD READERS

QUICKSCAN™ FAMILY



| QW21XX   | 2131   | QW24XX   | 2430  |
|--|--|--|---|
| The QuickScan Lite QW2100 linear imager<br>is an entry level reader specifically for<br>reading long and truncated bar codes<br>which is common in some areas of the<br>world. | The QuickScan 2131 series is a linear<br>imager featuring an extra-wide field of<br>view for reading long bar codes. Available<br>in Desk, Bluetooth® and Mobile (STAR<br>radio) versions. | The QuickScan Lite QW2400 2D corded<br>area imager is designed for reading<br>long and truncated 1D codes and larger<br>2D codes from close range. It has an<br>extra-wide field of view which allows the<br>capture of these bar codes. | The QuickScan 2430 series are 2D area<br>imagers with a new illumination and aim-<br>ing system. Available in Desk, Bluetooth®<br>and Mobile (STAR radio) versions. |
|  |  |  |   |
| Х  | Х  | Х  | Х   |
| Х  | Х  | Х  |   |
| Х  |  | Х  | Х   |
| u<br>Li<br>Li  |  |  |   |
| Linear Imager  | Linear Imager  | Area Imager  | Area Imager   |
| Instinctive  | Instinctive  | Instinctive  | Instinctive   |
| Scan Line  | Scan Line  | Blue Aiming Dot  | Two Blue Triangles  |
| Х  | Х  | Х  |   |
| RS-232 / USB / Keyboard Wedge  | RS-232 / USB / Keyboard Wedge / OEM<br>(IBM) USB   | RS-232 / USB / Keyboard Wedge  | RS-232 / USB / Keyboard Wedge / OEM<br>(IBM) USB  |
|  |  |  |   |
| 1D   | 1D   | 1D and 2D  | 1D and 2D   |
|  |  |  |   |
| Χ  | Х  | Х  | Х   |
| Х  | Х  | Х  | Х   |
| 10/2   | 10/2   | 10/2   | 10/2  |
| IP42   | IP42   | IP42   | IP42  |
| 1.5 m / 5.0 ft   | 1.5 m / 5.0 ft   | 1.5 m / 5.0 ft   | 1.5 m / 5.0 ft  |
| 3 Years  | QD2131: 5 Years<br>QBT2131: 3 Years QM2131: 3 Years  | 3 Years  | QD2430: 5 Years<br>QBT2430: 3 Years QM2430: 3 Years   |
|  |  |  |   |
|  | Bluetooth® 3.0 Class 2<br>STAR 2.0: 433 MHz  |  | Bluetooth® 3.0 Class 2<br>STAR 2.0: 433 MHz   |
|  | 25.0 m / 82.0 ft   |  | 25.0 m / 82.0 ft  |
|  |  |  |   |
|  | 500 + Linear Codes   |  | 500 + Linear Codes  |
|  | Li-Ion 1400 mAh  |  | Li-Ion 1400 mAh   |
|  | 30,000 +   |  | 30,000 +  |
|  | QBT2131, QM2131  |  | QBT2430, QM2430   |
|  |  |  |   |

## GENERAL PURPOSE HAND HELD READERS

| RIDA™ FAMILY   | GRYPHON™ FAMILY   |   |  |
|--|---|---|--|
|  |   |   |  |
| RIDA   | 41XX  | 45XX  |  |
| The DBT6400 is a cordless area imager with Bluetooth®<br>technology in a pocket-sized form factor. Available in a<br>Standard or Healthcare model. | The Gryphon 41XX linear imagers provide advanced<br>reading and performance. Available in Desk, Bluetooth®,<br>Mobile (STAR radio) and Healthcare versions. | The Gryphon 45XX 2D area imagers provide a new cutting<br>edge design, megapixel optics and a unique wireless<br>battery charging system. Available in Desk, Bluetooth®,<br>Mobile (STAR radio), DPM and Healthcare versions. |  |
| Х  | Х   | Х   |  |
| ^  | X   | X   |  |
|  | ×   | X   |  |
| Х  | ×   | X   |  |
| Λ  | Λ   | Λ   |  |
| Area Imager  | Linear Imager   | Area Imager   |  |
| Instinctive  | Distance  | Distance  |  |
|  |   |   |  |
| 4-Dot Aimer  | Scan Line   | 4-Dot/Center Cross Aimer  |  |
| USB (with BC6020 only)   | X<br>RS-232 / USB / Keyboard Wedge / Wand / IBM46XX<br>available with accessory cable   | RS-232 / USB / Keyboard Wedge / IBM46XX available<br>with accessory cable   |  |
|  |   |   |  |
| 1D and 2D  | 1D  | 1D, 2D and Dotcode  |  |
|  |   | DPM Model   |  |
| V  |   | X   |  |
| X X  | Х   | X X X   |  |
| × ×  | X   | × × ×   |  |
| , A  | A   | , A   |  |
| IP52   | IP52  | IP52  |  |
| 1.5 m / 5.0 ft   | 1.8 m / 5.9 ft;<br>HC Model: 1.5 m / 5.0 ft   | 1.8 m / 5.9 ft  |  |
| 3 Years  | GD4100: 5 Years<br>GBT4100, GM4100: 3 Years   | GD4500: 5 Years;<br>GBT4500, GM4500: 3 Years  |  |
|  |   |   |  |
| Bluetooth® 4.0   | Bluetooth® 3.0<br>STAR: 433 or 910 MHz  | Bluetooth® 4.0<br>STAR: 433 or 910 MHz  |  |
| 25.0 m / 82.0 ft   | 30.0 m / 98.4 ft  | BT: Up to 100 m / 328 ft<br>STAR: Up to 50 m / 164 ft   |  |
| Х  | Х   | Х   |  |
| Li-lon 700 mAh   | Li-Ion 2550 mAh   | Li-Ion 3250 mAh   |  |
|  | GBT: 30,000 + /<br>GM: 50,000 +   | GBT: 80,000 + /<br>GM: 60,000 +   |  |
|  | GBT4100, GM4100   | GBT4500, GM4500   |  |
|  |   |   |  |

### INDUSTRIAL HAND HELD READERS

POWERSCAN™ FAMILY



| 91XX  | 93XX  | 95XX RETAIL   | 95XX   |
|---|---|---|--|
| The PowerScan 91XX linear imagers<br>introduce a new green scanning line for<br>outstanding 1D data collection. Avail-<br>able in Desk, Bluetooth® and Mobile<br>(STAR radio) versions. | The PowerScan 93XX laser readers<br>offer state-of-the art performance in an<br>industrial product. Available in Desk,<br>Bluetooth® and Mobile (STAR radio)<br>versions. | The durability of the PowerScan im-<br>agers are now available for the Retail<br>sector. Available in Desk, Bluetooth®<br>and Mobile (STAR radio) versions. | The PowerScan 95XX area imagers<br>include omnidirectional reading with<br>outstanding optical characteristics.<br>Available in Desk, Bluetooth®, Mobile<br>(STAR radio) and DPM versions. |
|   |   |   |  |
| Х   | Х   | Х   | Х  |
| Х   | Х   | Х   | Х  |
| Х   | Х   | Х   | Х  |
|   |   |   | Х  |
|   |   |   |  |
| Linear Imager   | Laser   | Area Imager   | Area Imager  |
| Distance  | Distance / Auto Range   | Instinctive / Distance  | Instinctive / Distance<br>Auto Range<br>DPM Models:<br>Contact / Instinctive   |
| Laser-like Line   | Laser Line  | 4-Dot/Center Cross Aimer  | Frame Aimer/Center Cross   |
|   |   |   | Х  |
| RS-232 / USB / Keyboard Wedge /<br>Ethernet / Industrial Fieldbus   | RS-232 / USB / Keyboard Wedge /<br>Ethernet / Industrial Fieldbus   | RS-232 / USB / Keyboard Wedge   | RS-232 / USB / Keyboard Wedge /<br>Ethernet / Industrial Fieldbus  |
|   |   |   |  |
| 1D  | 1D  | 1D and 2D   | 1D and 2D  |
|   |   |   | DPM Model  |
|   |   | Х   |  |
| Y   |   | X   | X  |
| X X   | Х   | X X   | X X  |
| A   | A   | A   | A  |
| IP65  | IP65  | IP65  | IP65   |
| 2.0 m / 6.6 ft  | 2.0 m / 6.6 ft  | 2.0 m / 6.6 ft  | 2.0 m / 6.6 ft   |
| 2.0111/ 0.010   | 2.01117 0.011   | 2.01117 0.010   | 2.01117 0.011  |
| 3 Years   | 3 Years   | 3 Years   | 3 Years  |
| Bluetooth® 3.0<br>STAR: 433 or 910 MHz  | Bluetooth® 3.0<br>STAR: 433 or 910 MHz  | Bluetooth® 3.0<br>STAR: 433 or 910 MHz  | Bluetooth® 3.0<br>STAR 2.0: 433 or 910 MHz   |
| BT: Up to 100 m / 328 ft<br>433: Up to 100 m / 328 ft<br>910: Up to 400 m / 1,312 ft  | BT: Up to 100 m / 328 ft<br>433: Up to 100 m / 328 ft<br>910: Up to 400 m / 1,312 ft  | BT: Up to 90 m / 295 ft<br>433: Up to 50 m / 164 ft<br>910: Up to 100 m / 328 f   | BT: Up to 90 m / 295 ft<br>433: Up to 100 m / 328 ft<br>910: Up to 150 m / 492 ft  |
| PM9100  | PM9300  | PM9500 Retail   | PM9500   |
| Х   | Х   | Х   | Х  |
| Li-Ion 2150 mAh   | Li-Ion 2150 mAh   | Li-Ion 2150 mAh   | Li-Ion 2150 mAh  |
| PBT: 50,000 + / PM: 50,000 +  | PBT: 50,000 + / PM: 50,000 +  | PBT: 30,000 + / PM: 30,000 +  | 30,000 +   |
|   |   | Vertical Cradle   |  |



We can be added to spA, and/or its affiliates - Auting its reserved, without infining the ingits inder copyright, no part or inits documentation may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means, or for any purpose, without the express written permission of Datalogic S.p.A. and/or its affiliates. • Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. and/or its affiliates, registered in many countries, including the U.S. and the E.U. • PowerScan, QuickScan, Gryphon and Heron are trademarks of Datalogic S.p.A. and/or its affiliates, registered in many countries, including the U.S. and the E.U. • RIDA and Datalogic STAR Cordless System are trademarks of Datalogic Sr.a. and/or its affiliates. • The Bluetooth word mark and logos are trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Datalogic Group companies is under license. • All other trademarks and brands are property of their respective owners. • Product specifications are subject to change without notice. • PG-HH-ENA4 Revision B 20190108

www.datalogic.com