

PP-9715W



- XPPC continues the XPOS's DNA, keep it slim and dual-hinge design.
- Using Intel Coffee Lake 8th or 9th Generation Processor & Support High-speed PCIe M.2 SSD.
- Adjustable angle and height improve the viewing angle, enhance the user experience, can also be Desktop, Pole or Wall-mounted.
- Easy for maintenance: Easy to access DRAM/ SSD/ MB.
- Shared Peripherals: Share the same peripherals with XPOS.

01/ ECO-FRIENDLY

Reduce the size and package to save the environment and for easier transportation



02/ WITH PAYMENT EFT / SCANNER

Two ways for add-on device settlement.



**Arm type
Barcode Scanner**




Payment Device




RFID Device

03/ 2nd Display

Arm / Pole Type for different countertop

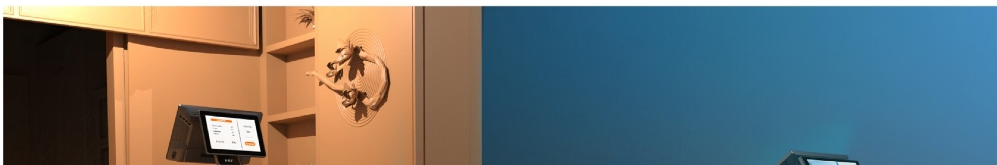

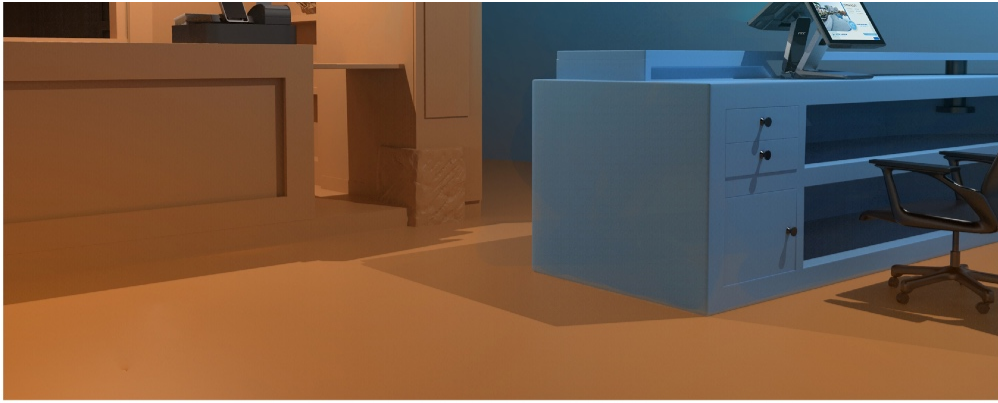


04/ SENSOR


Ambient light sensor allows system automatically adjust the brightness of the screen according to the environment.



05/ COFFEE LAKE


High Performance CPU For Complex solution.

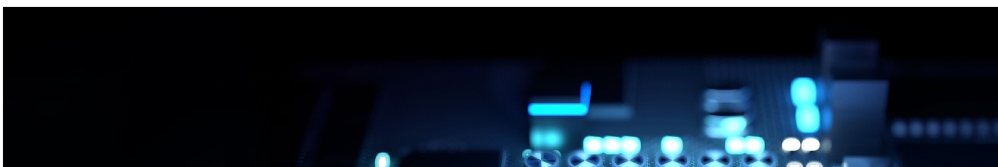

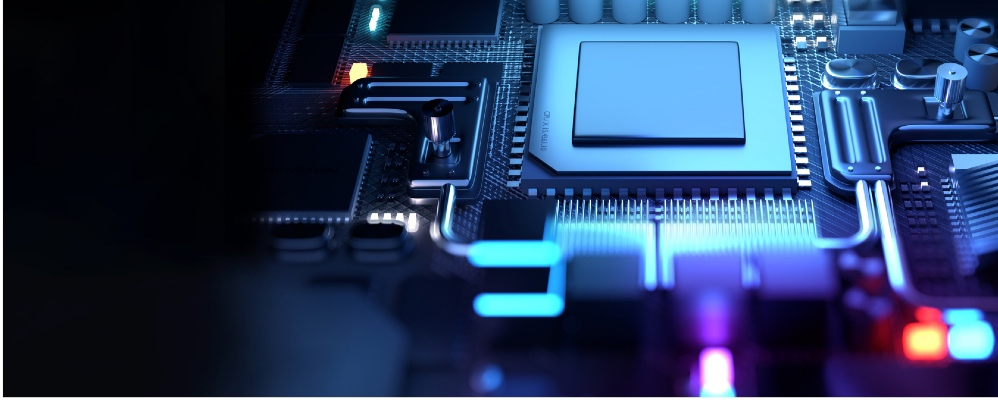


06/ A LITTLE EXTRA

Hidden adapter in base or customized I/O (by project).

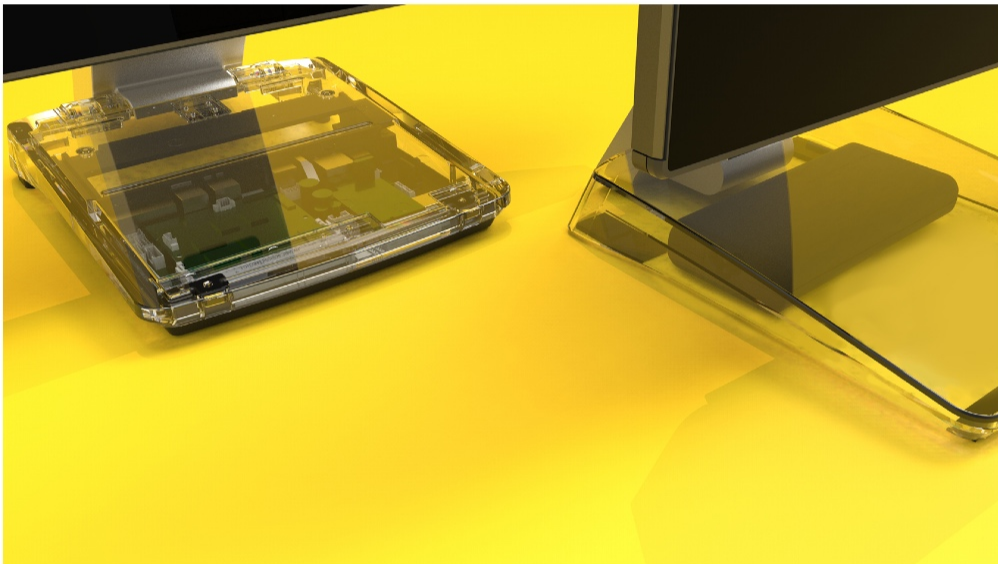

Specifications



CPU

Intel® Celeron® G4900T 2M
Cache, 2.90GHz

Intel® Pentium® G5400T 4M
Cache, 3.10GHz



Memory

4GB Standard, Max 32GB (2 x So-
DIMM DDR4)

Intel Core™ i3 9100TE 6M,
3.20GHz

Intel Core™ i5 9500TE 9M,
3.60GHz



Storage

2 x M.2 M Key (SATA III or PCIe)




Connection

1 x M.2 E Key 802.11ac + BT
(Optional)



Speaker

2 x 2W Internal Speaker



Display

15.6" TFT , 1920 x 1080



Touch

True-Flat PCAP



Brightness

300 nits



MTBF

30K Hours



Power

20V /130W External Adapter



OS

Windows 10 Pro



Mounting

VESA 100 x 100 mm



Certification

FCC / CE Class B



Appearance

Aluminum Die-Casting + Plastic
Galaxy Grey + Silver



Temperature

Operation: 0 °C ~ 40 °C (32 °F ~
104 °F)

Storage: -20 °C ~ 60 °C (-4 °F ~
130 °F)



Dimensions (W x H x D)

Product: 368 x 257 x 315 mm

Carton: 492 x 168 x 488 mm



Weight

Net 4.1 KG,

Gross 5.7 KG



Port

1 x Video Port

1 x PUSB 24V

1 x FEC I/O (Reserved for
additional DC output 5V/12V/24V,
USB, or Com ports)

1 x USB DP / FEC DP (Select by)

1 x USB DP / FEC DD (select by BIOS)

3 x RJ45 (COM 1, COM2, Com3)
RS232

4 x USB Type A (2 x USB 2.0, 2 X
USB 3.0)

1 x RJ45 GigaLAN