



2D/1D Imager
Barcode Scanner



DuraScan® D740 v21

Universal Bluetooth Barcode Scanner

The D740 v21 is a universal Bluetooth® Barcode Scanner, able to read 1D and 2D barcodes on paper and screen. The D740 has been enhanced to scan small barcodes and has a scanning range of 2 to 19 inches. Reads 1D, 2D, OCR A & B fonts, OCR USC, OCR passport, OCR MICR (E13B) fonts and DotCode, covering most travel identification documents, including passports, international IDs and micro QR codes on drivers' licenses. Excellent option for solutions requiring age verification and tracking cannabis, alcohol, or tobacco sales.

The D740 was built for mobility and durability. It is IP54 rated for dust and water, comes with a field-replaceable battery, and withstands multiple drops. Also great for warehousing and manufacturing applications due to the scanning versatility, scanning range and the ability to scan small barcodes. It is lightweight, ergonomic designed and has a long-lasting battery. Plus, the scanner is exceptionally easy to use, with intuitive notifications for battery level, Bluetooth connection, and scanning status.


To enjoy optimal reliability and performance from the D740, it is recommended that users check with their app provider to ensure they have upgraded to the latest version of Capture SDK.



Features

- **Certified by Apple® for iOS devices (iPad®, iPhone®, iPod Touch®) and compatible with Android, Windows®, Mac and Linux.**
- **Bluetooth® Wireless Technology** - Dependable Bluetooth connection to iOS, Android and Windows 10 devices. Auto-reconnection maintains even in different environments.
- **Scanning** – Fast 2D and 1D barcode scanning with highly visible and safe LED aimer and omni-directional ability, allowing intuitive rapid scanning. Scans OCR A&B fonts, OCR USC, OCR passport and OCR MICR (E13B) fonts. Scans on paper or screen.
- **Auto Scan Mode** - Presentation Mode (automatic scanning) provides continuous scanning capabilities without pressing the scan button.
- **Exceptional Ergonomics** – Small, light and fits perfectly in the hand for comfortable use.
- **Long-Lasting, Replaceable, Rechargeable Battery** - Power to last over 16 hours.
- **User Indicators** – Intuitive LEDs for Bluetooth connection, battery level and scanning status.
- **User Feedback** - Audible tones and pulsation.
- **Rugged Design** – IP54 rating for dust and water splashing; withstands multiple drops to concrete.
- **LED Aimer** - Bright, rectangular illumination field with LED pointer for precise aiming.
- **Decoding Ability** - Reads damaged and poorly printed barcodes.
- **Developer Support Available** - The Capture SDK is available with subscription.
- **Native App Support** – Socket Mobile's Capture SDK enables easy native app integration in your applications to improve business productivity.
- **Wearable** - Wrist strap included. Optional: Holster and Durable Retractable Clip available.
- **1-Year Warranty.**
- **Designed and Assembled in the USA.**

Physical Characteristics

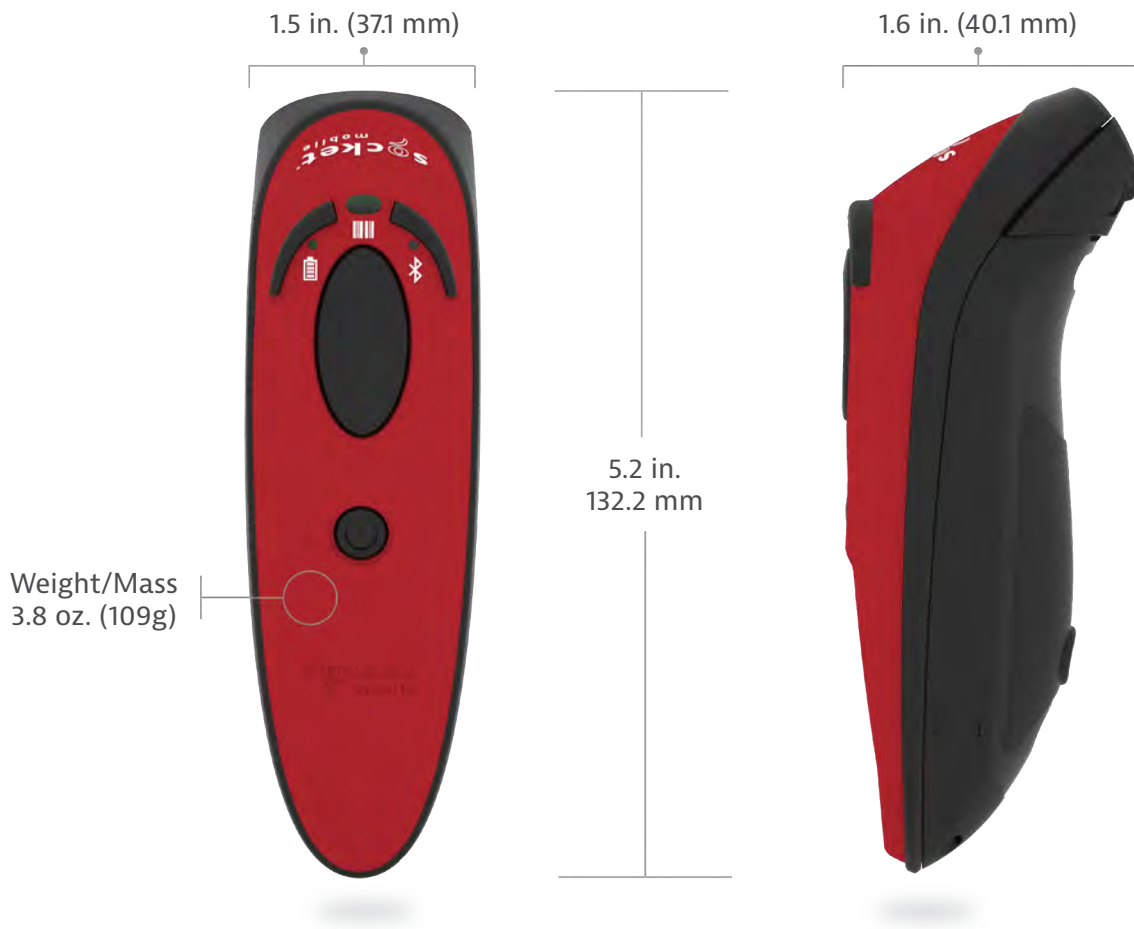



Single Package includes

(1) DuraScan D740, Universal Barcode Scanner and Rechargeable Battery (pre-installed)

(1) Charging Cable
(1) Wrist Strap
(1) Get Started insert

The D740 is available in 4 colors:

Color:	SKU#
Black	CX3760-2412
Gray	CX3426-1872
Red	CX3740-2392
White	CX3750-2402



**Socket Mobile
Companion App
Download for Free!**

Optional Accessories

Charging Stand



Great for using AutoScan Mode

Charging Cradle



Perfect for wall mounting

Charging Dock



Ideal as a desktop charger

Durable Retractable Clip



Provides quick access to scanner

Holster



Safe and accessible placement

Scanner & Phone Holder



One-handed solution

Default Barcode Symbologies:

1D Symbologies: Bookland EAN, Codabar, Code 39, Code 93, Code 128, EAN-13/JAN, EAN-8/JAN, GS1 Databar, GS1 Databar Expanded, GS1 Databar Limited, GS1-128, Interleaved 2 of 5, ISBT 128, UPC A, UPC EO

2D Symbologies: Aztec, Data Matrix, DotCode, Maxicode, Micro PDF417, PDF417, QR Code

Postal Codes: Australia Post

OCR Typeface: OCR-B ICAO Travel Documents

Supported Barcode Symbologies:

1D Symbologies: Bookland EAN, Chinese 2 of 5, Codabar, Code 11, Code 39, Code 93, Code 128, Composite CC-A/B, Composite CC-C, Composite TLC, Discrete 2 of 5, EAN-13/JAN, EAN-8/JAN, GS1 Databar, GS1 Databar Expanded, GS1 Databar Limited, GS1-128, Interleaved 2 of 5, ISBT 128, ISSN EAN, Matrix 2 of 5, MSI, UPC/EAN/JAN, UPC A, UPC EO

2D Symbologies: Aztec, Data Matrix, DotCode, GS1 Data Matrix (S740 with Green scan LED only), GS1 QR Code (S740 with Green scan LED only), Maxicode, Micro PDF417, MicroQR, PDF417, QR Code

Postal Codes: Australia Post, Han Xin, Japan Postal, KIX Code, Maxicode, Netherlands, UPU FICS Posta, US Planet, US Postnet, USPS 4CB/One Code/Intelligent Mail

OCR Typeface (S740 with Green scan LED only): OCR-A, OCR-B, MICR (E13B), US currency serial number

Scan Angle:

44.5° (Horizontal) 33.5° (Vertical)


Sensor Resolution:

1280 x 960 pixels, rolling shutter

Print Contrast:

Down to 25%-20%

Reading Distance:

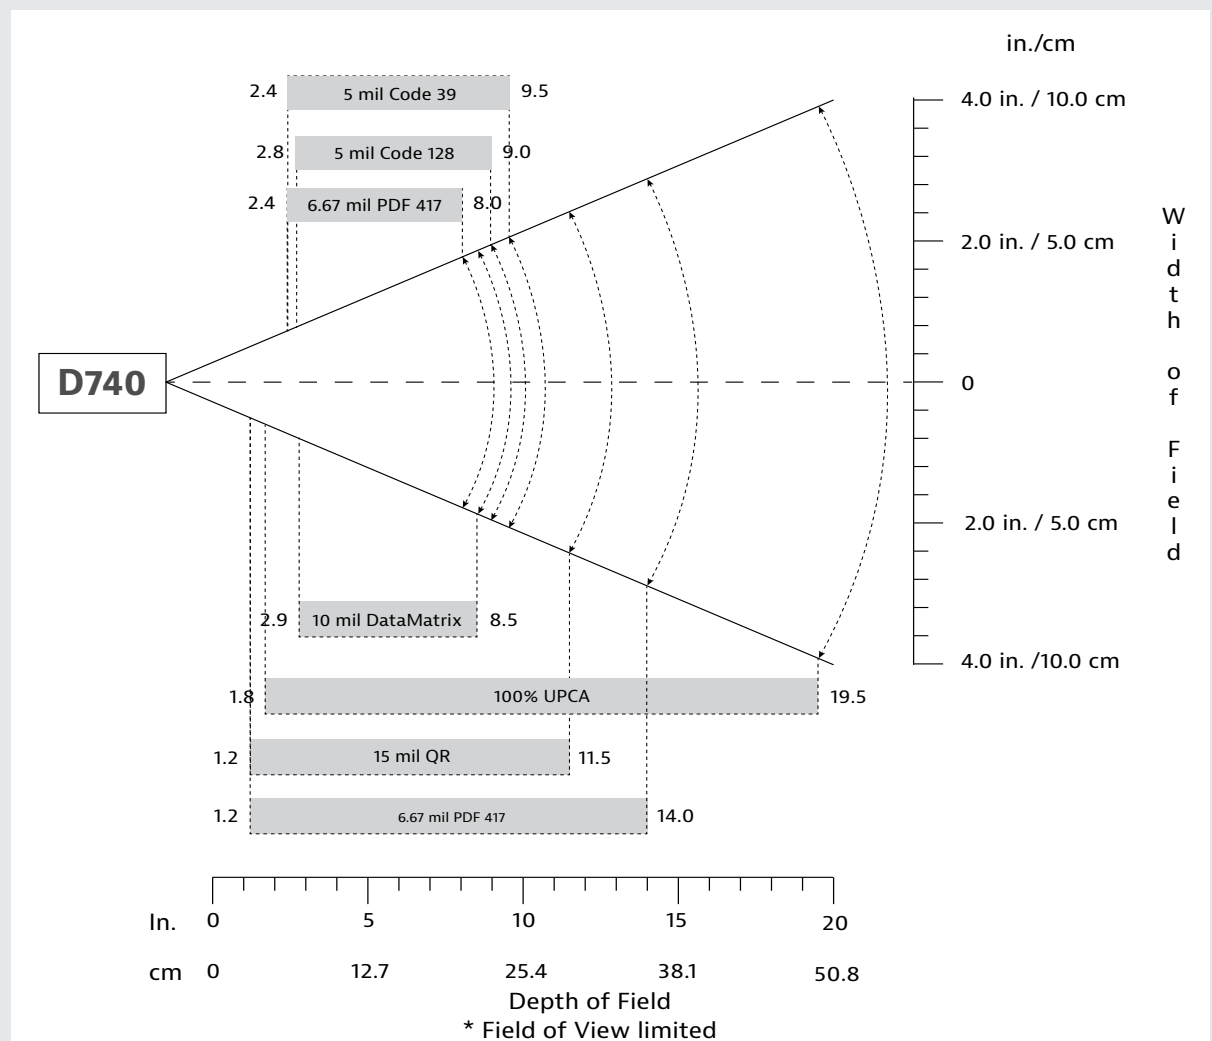

3.0 to 49.5 cm (1.2 to 19.5 in.) Depends on barcode size, symbology, label media

Decode Ranges:

	Near	Far
5 mil Code 39	2.4 in/6.1 cm	9.5 in/24.1 cm
5 mil Code 128	2.8 in/7.1 cm	9.0 in/22.9 cm
6.67 mil PDF417	2.4 in/6.1 cm	8.0 in/20.3 cm
10 mil DataMatrix	2.9 in/7.4 cm*	8.5 in/21.6 cm
100% UPCA	1.8 in/4.6 cm*	19.5 in/49.5 cm
15 mil QR	1.2 in/3.0 cm*	11.5 in/29.2 cm
20 mil QR	1.2 in/3.0 cm	14.0 in/35.6 cm

Scanner Type

Technology:	2D/1D Barcode Imager
Aimer:	Green LED

Battery

Battery Type:	Replaceable 1400 mAh Lithium - Ion Battery
Charge Time:	6 Hours
Battery Life:	500 charge-discharge cycles
Battery Life - Per Full Charge:	Battery Friendly with standby time: over 20 hours Active Scan Time: 85,000 scans within 9 hours (based on 2 scans every 1 second) 17,000 scans within 19 hours (based on 1 scan every 4 seconds)
Note:	Battery life varies depending on ambient temperature, ambient light and age of battery. For more battery information https://www.socketmobile.com/support/battery-information .
Number of Batteries Used:	1
Weight of Battery:	35g
Percentage Lithium:	26.5%
Battery mAh:	1400 mAh
Number of Cell Per Battery:	1
Watt Hours Per Battery:	5.55
Type of Cell (ex.AA):	Proprietary
Chemical Composition (ex. Alkaline):	Lithium-polymer
Lithium Content:	9.32 g
Battery Voltage:	3.7v
Hazmat UN Number:	UN3481, P.I. 967
ROHS Compliance Indicator:	Yes, included with scanner
Country of Origin:	China
Commodity Code:	8507.60.0000

Warranty

Scanner:	Standard one year limited warranty for barcode scanners
Accessories:	90 days for batteries, charging cable and wrist strap
Extended Warranty: (sold separately)	www.socketmobile.com/socketcare



Bluetooth (wireless connection)

Bluetooth Radio:	Class 2 Bluetooth, version 2.1 + EDR (Enhanced Data Rates) with 56-bit data encryption
Bluetooth Range:	Up to 10 meters (33 ft.) depending on environment, range limit is usually due to the Host Device (phone, tablet or notebook)
Bluetooth Profiles:	Basic Mode - Human Interface Device (HID)*, Application Mode - Serial Port Profile (SPP) and Application Mode - MFi-SPP. Some Operating Systems or smartphone/tablet models may support only one profile. <i>*By default, the scanner is set to Basic Mode (HID).</i>

Apple, Android and Windows PC with Bluetooth Classic HID are compatible with all Socket Mobile scanners.

*Chromebook and Linux supports HID mode only.

User Environment

Ambient Light:	From 0 to 100 000 lux, From pitch black to direct sun light
Operating Temperature:	0° to 45° C (32° to 113° F)
Storage Temperature:	-5° to 70° C (-22° to 158° F)
Relative Humidity:	95% at 60° C (140° F) (non-condensing)
Sealing:	IP54 (Ingress Protection rating for dust and water) EN60529
Tumble Specification:	2,500 cycles at 3.3 ft. (1 m) to metal plate, IEC6008-2-31, IEC60068-2-32 3
Drop Specification:	6 drops to concrete - 1 on each side at 6.6 ft. (2 m)

Operating System Compatibility

Android OS - Basic Mode (HID)* and App Mode (SPP)	Mac OS and Linux - Basic Mode (HID)* only
Apple iOS - Basic Mode (HID)* and App Mode (MFi-SPP)	Windows OS 10 - Basic Mode (HID)* and App Mode (SPP)
Compatible with devices supporting Basic Mode (HID)* protocol. Supported keyboard languages - ANSI, English UK, English, French, German, Italian, Japanese, Polish, Spanish and Swedish	
<i>*By default, the factory settings of the Socket Mobile Scanners are set to Basic Mode (keyboard emulation: HID). In order to use the scanner with an application using Capture SDK, the scanner must be configured in Application Mode (Bluetooth Serial Port Profile: SPP)</i>	

iOS

iPadOS

macOS



Common Uses

Retail/Point of Sale	Warehouse management	Transportation
Office use	Shipping and Receiving	Gaming
Healthcare	Field Sales/Service	Manufacturing
Mobile Tracking	Banking	

Bluetooth SIG:	Declaration ID: D030473 QD ID: 82009
Electrical Safety:	Certified to IEC 60950-1, UL 60950-1, CAN/CSA C22.2
Environmental:	Environmental: RoHS EN 50581
EMI / RFI:	FCC Part 15 Class C, RSS 210, iCES 003, C-Tick, CISPR 22, CE EN55022, EN55024, TELEC FCC ID: T9J-RN42 IC ID: 6514-RN42 Telec:  201-125799
LED Safety:	IEC 62471, EN 62471 (EXEMPT GROUP)
ISO 9001 Accreditation	 



socketmobile.com

Worldwide: +1 510 933 3000
North America: +1 800 552 3300
EMEA & Russia: +41 62 834 07 80
France: +33 (801) 840504
Malaysia (Toll Free) +60 (1800) 818234

sales@socketmobile.com

Asia Pacific: +1 510 933 3122
Germany: +41 62 834 07 80
Switzerland: +41 62 834 07 80
Switzerland (Toll Free): +41 (800) 898003
UK/Ireland/South Africa: +44 (800) 0487363

sales-japan@socketmobile.com

Japan: +8190 9808 0518
Japan (Toll Free): +81 (800) 9190303
Latin America: +1-510-933-3153
Taiwan (Toll Free) +886 00801491497

©2021 Socket Mobile, Inc. All rights reserved. Socket®, the Socket Mobile logo, SocketScan®, DuraScan®, Battery Friendly® are registered trademarks or trademarks of Socket Mobile, Inc. Microsoft® is a registered trademark of Microsoft Corporation in the United States and other countries. Apple®, iPad®, iPad Air®, iPad mini®, iPad Pro®, iPhone®, iPod touch®, Objective-C®, Swift™, and Xcode® are registered trademarks of Apple, Inc., registered in the U.S. and other countries. The Bluetooth® Technology word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Socket Mobile, Inc. is under license. Other trademarks and trade names are those of their respective owners.